



# JOHN DEERE

## PowerTech™ **6081H** Diesel Engine Specifications

### PERFORMANCE DATA

#### Rated Power

Intermittent 350 hp (261 kW) @ 2200 rpm  
 Continuous 275 hp (205 kW) @ 2200 rpm

#### Peak Torque


Intermittent 1050 lb-ft (1424 N.m) @ 1500 rpm

#### Fuel Economy



BSFC 0.345 lb/hp-hr (210 g/kWh) @ 2200 rpm

RATED BHP is the power rating for variable speed and load applications where full power is required intermittently.  
 CONTINUOUS BHP is the power rating for applications operating under a constant load and speed for long periods of time.  
 POWER OUTPUT is within + or - 5% at standard SAE J 1995 and ISO 3046.

TIER 2 EMISSIONS CERTIFICATIONS: CARB, EPA, and EU.

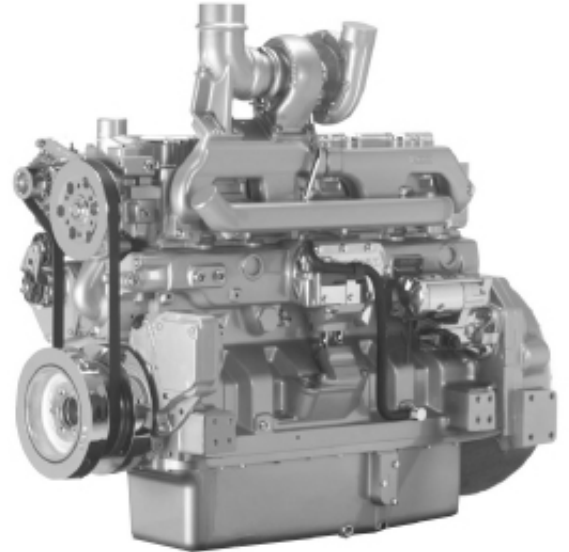

### PERFORMANCE CURVE

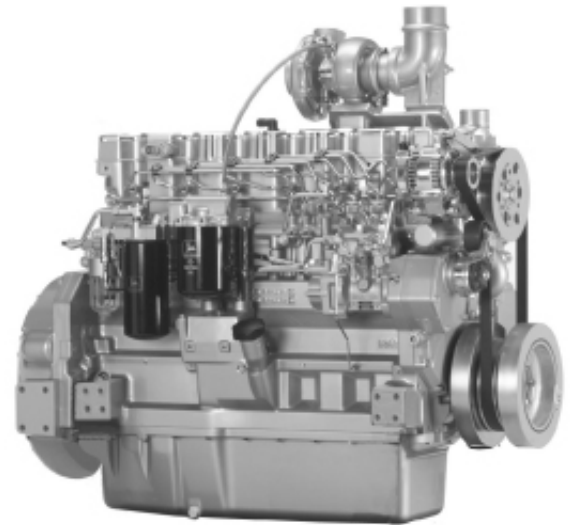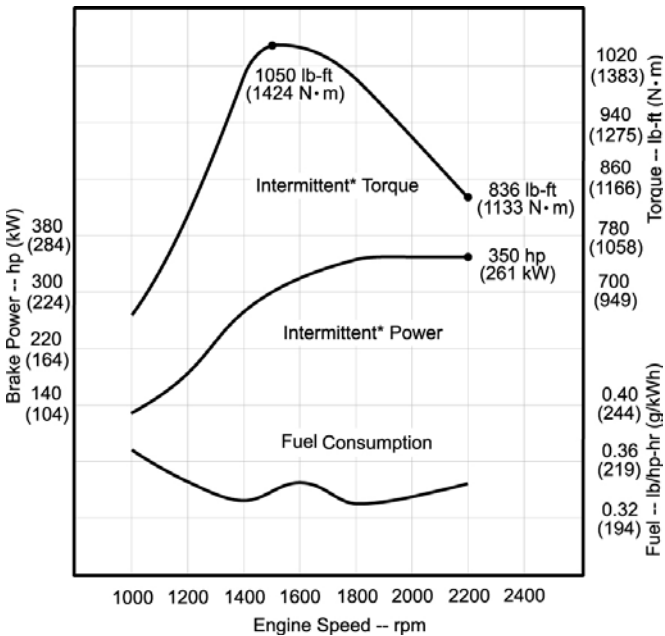

Photographs may show non-standard equipment




# PowerTech™ 6081H Diesel Engine Specifications

## GENERAL DATA

Model	6081HF070	Aspiration	Air-to-Air
Number of Cylinders	6	Length - in. (mm)	47.6 (1210)
Displacement - L (cu.in)	8.1 (496)	Width - in. (mm)	23.5 (599)
Bore and Stroke - in. (mm)	4.56 x 5.06 (116 x 129)	Height - in. (mm)	45.4 (1152)
Compression Ratio	15.7:1	Weight - lb (kg)	1711 (776)
Engine Type	In-line, 4-cycle		

## DIMENSIONS

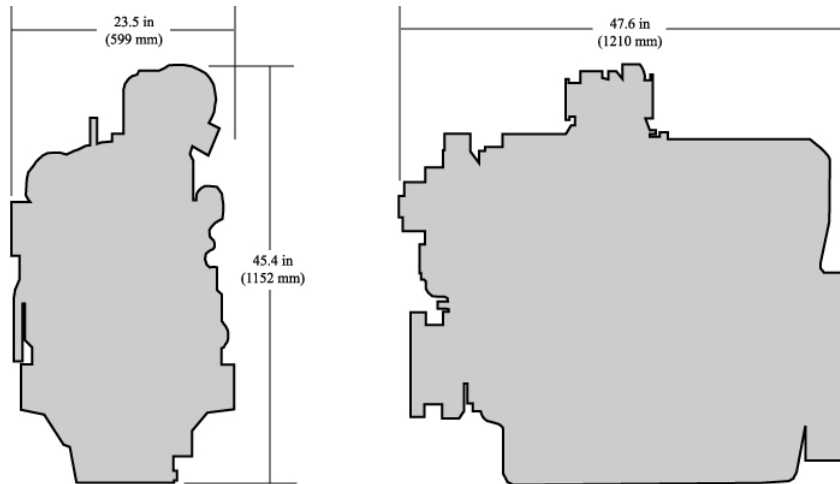

## FEATURES AND BENEFITS

### Directed Top-Liner Cooling

- Directing coolant to upper end of the liner reduces liner temperatures by up to 100 degrees F (54 degrees C), improving power cylinder durability and head gasket life, and reducing oil consumption and emissions

### SAE J1939 Standard Communication Link

- Industry standard, which provides an interface with vehicle systems, like the transmission, hydraulics and various accessory drives minimizing machine complexity and reducing vehicle total installed cost

### John Deere Electronic Controls

- John Deere electronically controlled fuel systems monitor critical engine functions and either derates or shuts down (override capability provided) an engine to prevent costly engine repairs
- Built-in controls eliminate need for costly add-on engine warning/shutdown systems and associated devices
- Service diagnostics and error codes automatically stored for later retrieval, increasing machine uptime
- Performance connector part of engine wiring harness which allows for programming of multiple power curves and droop or isochronous governor regulation

### Either-side service

- Combination oil fill/dipstick available on either side of the engine, greatly simplifying engine installation

### Gear auxiliary drive

- Left hand gear auxiliary drive available which provides up to 60 hp (45 kW), intermittent

### Self-adjusting poly-vee fan drive

- Self-adjusting, eight-groove, poly-vee drive provides multiple fan drive ratios and fan heights that can be matched to specific application requirements
- Poly-vee design provides more than twice the drive capacity of comparable vee-belts

### Additional Features

- 8.1 engine includes gear-driven water pump, improved accessory mounting, gear-driven auxiliary drive, self-adjusting poly-vee fan drive, air compressors, and high-mount A/C compressor options

### Optional Rear PTO

- Rear PTO is an integral part of the flywheel housing and provides a means for driving medium/large hydraulic pump(s), and air compressors
- Available in SAE #1 or SAE #2 flywheel-housing configuration for dry applications
- 1.3:1 output ratio allows the use of smaller, higher speed hydraulic pumps
- Gear train, pump drives, and flanged output drive are capable of up to 300hp/224kW (750 ft-lbs/1018 N.m torque) on an intermittent basis
- Right-hand side pad standard with optional left-hand side pad
- Standard SAE "C" and optional "B", "D" mounting pads and flange output drives

*Specifications and design subject to change without notice*



John Deere Power Systems  
3801 W. Ridgeway Ave.  
PO Box 5100  
Waterloo, IA 50704-5100  
Phone (800) 533-6446  
Fax (319) 292-5075

John Deere Power Systems  
Usine de Saran  
La Foulonnerie - B.P. 11013  
45401 Fleury-les-Aubrais Cedex-France  
Phone (33) 2 38 82 61 19  
Fax (33) 2 38 82 60 00